

DOS 2 Pump Station

Model – MG4231000

STANDARD FEATURES

- Quick change between bag holder and roller track convenient for canteens
- Ensures long shelf life for products
- Color touch-screen display
- Swivel wheels and brakes allow for portability and stability
- Minimized risk of scalding
- Increased workplace safety
- Reduces occupational injuries to shoulders and wrists.

Unit includes

- Dispensing pump Metos Dos-2
- Bag welder Metos Hot Fill Dos-2
- Adjustable height Metos Hot Fill Dos-2
- Sensor with USB Metos Hot Fill Dos-2
- Filling valve 38mm Metos Hot Fill Dos-2
- Conveyor extension
- Built-in compressor and more...



Pictured here with GN rollers Installed

Pictured here with Bag Welder-Installed

Air Supply

Tube with quick coupler, minimum 7 bar,
100 l per min.

Dimensions

Width 627 mm

Height 1670mm

Depth 637mm

Connections

Water Cold 3/4", 2 1/2" bar



Hot 3/4", 2 1/2" bar

Net Weight 270 kg

Waste 100 mm in diameter

Electrical

CEE plug, 32 A fuse, 400 Volt
Type B RCD 300 mA

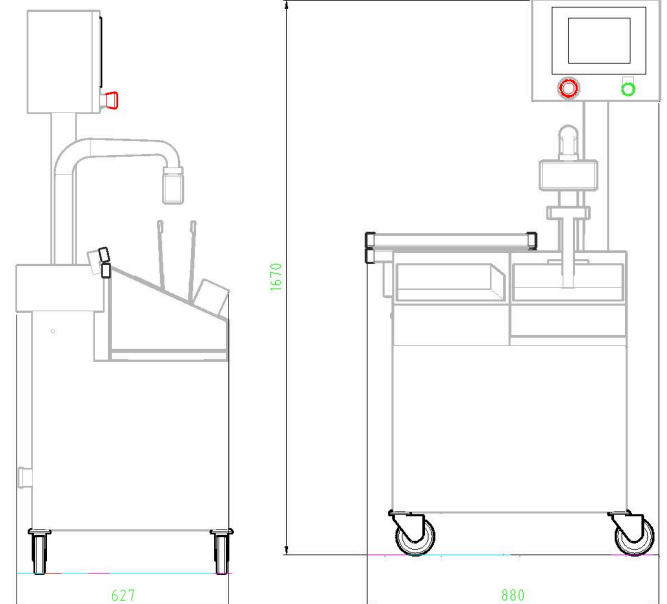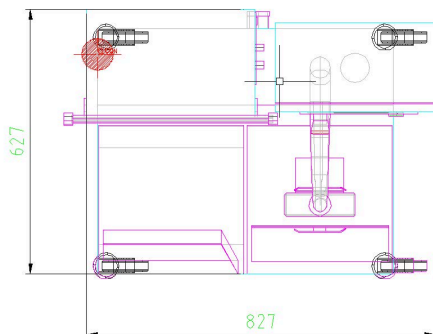

Finland
metos.com/manufacturing

Metos Oy Ab

Ahjonkaarre
FI 04220 Kerava
Finland
Telephone +358 204 3913
international.sales@metos.com

Disclaimer: All unit capacities are based on subjective testing.

In line with policy to continually develop and improve its products, Metos Oy Ab reserves the right to change specifications and design without notice.